

**UNCLASSIFIED**

---

---

**AD 297 374**

*Reproduced  
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY  
ARLINGTON HALL STATION  
ARLINGTON 12, VIRGINIA**



---

---

**UNCLASSIFIED**

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

CATALOGED BY ASTIA

AS AD 297374

63-2-5  
297 374

DISTRIBUTED EQUIVALENTS OF BRUNE SECTIONS

by

Akio Matsumoto


Report No. PIBMRI-1038-62

for

Rome Air Development Center  
Air Force Systems Command  
Rome, New York

Contract No. AF-30(602)-2213  
Project No. 8505, Task No. 85014

28 September 1962



MRI

POLYTECHNIC INSTITUTE OF BROOKLYN  
MICROWAVE RESEARCH INSTITUTE  
ELECTROPHYSICS DEPARTMENT

"Qualified requestors may obtain copies of this report from ASTIA Document Service Center, Arlington Hall Station, Arlington 12, Virginia. ASTIA Services for the Department of Defense contractors are available through the 'Field of Interest Register' on a 'need-to-know' certified by the cognizant military agency of their project or contract. "

"This report has been released to the Office of Technical Services, U.S. Department of Commerce, Washington 25, D.C., for sale to the general public. "

DISTRIBUTED EQUIVALENTS OF BRUNE SECTIONS

by


Akio Matsumoto

Polytechnic Institute of Brooklyn  
Microwave Research Institute  
55 Johnson Street  
Brooklyn 1, New York


Report No. PIBMRI-1038-62  
Contract No. AF-30(602)-2213  
Project No. 8505, Task No. 85014

28 September 1962

Title Page  
Foreword  
Abstract  
Table of Contents  
28 Pages of Text  
7 Pages of Figures  
Distribution List



Akio Matsumoto  
Research Associate Senior

Approved by: 

H. J. Carlin  
Acting Head, Electrophysics

Prepared for  
Rome Air Development Center  
Air Force Systems Command  
Rome, New York

**FOREWORD**

**The work reported herein was sponsored by the Rome Air Development Center, Air Force Systems Command under contract No. AF-30(602)-2213.**

ABSTRACT

~~This report presents~~ six new descriptive Brune sections *are presented* which in many instances are preferable to those suggested by Ikeno and Saito. Included is a complete design technique.

TABLE OF CONTENTS

Acknowledgment	<u>Page</u>
Abstract	
I. Introduction	1
II. Restrictions on the Realizability of Ikeno Loop	3
III. Notations of Line Constants	4
IV. Saito Section	7
V. Network (I)	9
VI. Network (II)	13
VII. Network (III)	17
VIII. Network (IV)	19
IX. Network (V)	24
X. Network (VI)	25
XI. Concluding Remarks	27
References	
Figures	



## DISTRIBUTED EQUIVALENTS OF BRUNE SECTIONS

by

Akio Matsumoto

I. Introduction A rational positive real function  $Z(p)$  may be synthesized, according to Darlington procedure, as a cascade of Brune, type C and D sections, a Foster function (reactance) and a resistance. If there are transmission zeros at  $p = 0$  or (and)  $p = \infty$ , ladders will also be necessary.

A so-called Brune section is made up of a pair of close-coupled coils ( $L_1, L_2$ ) and a capacitor ( $C_0$ ), and has a pair of transmission zeros (see Fig. 1(a))

$$\left. \begin{aligned} \frac{1}{p_0} &= \frac{1}{j\omega_0} = \frac{1}{\frac{j}{\sqrt{MC_0}}} \\ M &= \sqrt{L_1 L_2} \end{aligned} \right\} \quad (1)$$

on the imaginary axis of the  $p (= j\omega)$  plane. The section may also be represented in  $\pi$  - structure, with an inductance  $L$  and three capacitances  $K, K_1$  and  $K_2$ . The equivalence of the two structures holds if

$$\left. \begin{aligned} L &= L_1 + L_2 - 2M \\ K &= \frac{MC_0}{L_1 + L_2 - 2M} \\ K_1 &= \frac{(L_2 - M)C_0}{L_1 + L_2 - 2M} \\ K_2 &= \frac{(L_1 - M)C_0}{L_1 + L_2 - 2M} \end{aligned} \right\} \quad (2)$$

There is a relation

$$K(K_1 + K_2) + K_1 K_2 = 0 \quad (2a)$$

corresponding to the close-coupling between  $L_1$  and  $L_2$ . At a high frequency, these sections have a voltage transformation ratio

$$\frac{V_2}{V_1} = \frac{L_2}{M} = \frac{K}{K+K_2} \equiv n \quad (3)$$

The value of  $n$  may be greater or smaller than unity according as  $L_2 \gtrless M$ ,  $K_2 \lessgtr 0$ .

No distributed network is known that is a direct equivalent of a Brune section itself, but certain networks are known which are equivalent to a Brune section accompanied by another element, such as a line or a reactance.

Ikeno<sup>1</sup> proposed a loop of 4 lines (Fig. 2(a)), that will be equivalent to a cascade of a Brune section and a line (Fig. 2(b), (c)), but there must be certain conditions among the given parameters ( $L_1$ ,  $L_2$ ,  $C_0$  and  $Z$ ) in order to give positive characteristic impedances ( $Z_0$ ,  $Z_{01}$ ,  $Z_{02}$  and  $Z_{03}$ ) of the lines in the loop. If these conditions are not satisfied, his loop cannot be realized.

Saito<sup>2</sup> made another proposal. His section consists of a two-wire line and an open-circuited coaxial line. But the condition of realizability of his network is just the same as Ikeno's.

A possibility remains, to realize the network by extracting a sufficiently large number of cascaded lines, if only its input impedance is given. But this procedure may not be a good practice because of the complication of the network.

In this article is described a group of 6 networks, made of a shielded 3-wire line connected in different ways, which have a network representation of a Brune section in cascade with a line. They have certain restrictions coming from the hyperdominancy of the capacitance matrix of the line, but still have a large adaptability arising from the abundance of the parameters. In fact, one has 6 parameters ( $C_{11}$ ,  $C_{22}$ ,  $C_{33}$ ,  $C_{12}$ ,  $C_{13}$  and  $C_{23}$ ) in a 3-wire line, whereas its network representation contains only 4 parameters ( $C_0$ ,  $L_1$ ,  $L_2$  and  $Z$ ). If the line is given, its network representation is uniquely determined. This is the standpoint of analysis. On the other hand, from the standpoint of synthesis, the line cannot be determined uniquely that will have a given network representation. There remains some freedom of selection of parameters which is left to the designer. This freedom may be made use of in obtaining appropriate geometrical dimensions of the line.

## II. Restrictions on the realizability of Ikeno loop.

The elements of Ikeno loop (Fig. 2(a)) are given as follows:

$$\left. \begin{aligned}
 Z_o &= \frac{L_1 + L_2 - 2M + Z(1 + L_1 C_o)}{1 + M C_o} \\
 Z_{o2} &= \frac{L_1 + L_2 - 2M + Z(1 + L_1 C_o)}{C_o \{ Z - (M - L_2) \}} \\
 Z_{o2} &= \frac{L_1 + L_2 - 2M + Z(1 + L_1 C_o)}{C_o (L_1 - M + L_1 C_o Z)} \\
 Z_{o3} &= \frac{Z \{ L_1 + L_2 - 2M + Z(1 + L_1 C_o) \}}{L_1 + L_2 - 2M + (L_1 - M) C_o Z}
 \end{aligned} \right\} \quad (4)$$

The parameters  $L_1$ ,  $L_2$ ,  $M$ ,  $C_o$  and  $Z$  refer to Fig. 2(b).  $L_1$  and  $L_2$  are closely coupled.

The numerators of the right-hand sides of Eq. (4) are all positive. To have positive values of the elements of the loop, the denominators must all be positive:

$$Z - (M - L_2) > 0 \quad (5a)$$

$$L_1 - M + L_1 C_o Z > 0 \quad (5b)$$

$$L_1 + L_2 - 2M + (L_1 - M) C_o Z > 0 \quad (5c)$$

The case  $L_1 = L_2$  is trivial, because that means the Brune section is merely a shunt Foster.

First, consider the case  $L_1 < L_2$ . Then Eq. (5b) requires

$$C_0 Z > \sqrt{\frac{L_2}{L_1}} - 1 \quad (6)$$

while Eq. (5c) requires the contrary, so that the case  $L_1 < L_2$  cannot exist.

Next, take the case  $L_1 > L_2$ . Here Eqs. (5b) and (5c) are satisfied, and (5a) is the only necessary. That is

$$L_1 > L_2 \text{ and } Z > M - L_2 \quad (7)$$

are the necessary (and also sufficient) conditions for the realizability of Ikeno loop. In other words, the coil facing outside should be of a greater inductance than that facing inside, and moreover the inductance  $M - L_2$  (positive) should be smaller than the characteristic impedance of the line behind the Brune section.

If either of these two conditions is not satisfied, Ikeno loop cannot be realized.

To make Ikeno loop correspond to the network representation Fig. 2(c), one has only to interchange  $L_1 \longleftrightarrow L_2$  and  $Z_{01} \longleftrightarrow Z_{03}$ . Here the necessary and sufficient conditions of realizability are

$$L_2 > L_1 \text{ and } Z > M - L_1 \quad (7a)$$

### III. Notations of line constants

A uniform multiwire line<sup>3</sup> can be treated with the use of its distributed capacitances:

$$[C] = \begin{bmatrix} C_{11} & -C_{12} & \dots & -C_{1n} \\ -C_{12} & C_{22} & \dots & -C_{2n} \\ \dots & \dots & \dots & \dots \\ -C_{1n} & -C_{2n} & \dots & C_{nn} \end{bmatrix} \quad (8)$$

Its distributed inductances  $[L]$  are related to the distributed capacitances  $[C]$  in such a way that

$$p^2 [L] [C] = \gamma^2 1_n, \quad p \equiv j\omega \quad (9)$$

where  $\gamma$  is the propagation constant of any transverse mode in the (non-dissipative) line.

$p/\gamma = v$ , the velocity of propagation, is independent on the frequency.

Define  $[\eta]$  and  $[\xi]$  by

$$[\eta] = \frac{p}{\gamma} [C]$$

$$= \begin{bmatrix} \eta_{11} & -\eta_{12} & \dots & -\eta_{1n} \\ \eta_{12} & \eta_{22} & & -\eta_{2n} \\ \dots & \dots & \dots & \dots \\ -\eta_{1n} & -\eta_{2n} & \dots & \eta_{nn} \end{bmatrix}, \quad (10)$$

$$[\xi] = \frac{p}{\gamma} [L]$$

$$= \begin{bmatrix} \xi_{11} & \xi_{12} & \dots & \xi_{1n} \\ \xi_{12} & \xi_{22} & \dots & \xi_{2n} \\ \dots & \dots & \dots & \dots \\ \xi_{1n} & \xi_{2n} & \dots & \xi_{nn} \end{bmatrix}, \quad (11)$$

then  $[\eta]$  and  $[\xi]$  may be called the characteristic admittance matrix and the characteristic impedance matrix respectively. They are reciprocal to each other,

$$[\eta] [\xi] = [\xi] [\eta] = 1_n \quad (12)$$

$$\lambda = \tanh \gamma l \quad (13)$$

Let us consider, for the moment, a very low frequency, such that

$$\lambda = \tanh \gamma l = \gamma l, \quad (14)$$

$$\begin{aligned} \lambda [\eta] &= p [C] t \\ \lambda [\xi] &= p [L] t \end{aligned} \quad (15)$$

**[ $\eta$ ] must be hyperdominant:**

[illegible]

$$\zeta_{\mu\mu} \geq \zeta_{\mu\nu}, \quad \mu \neq \nu \quad (17)$$

A hyperdominant matrix  $\eta$  is realizable as the characteristic admittance matrix of a multiwire line.

The fundamental equations of transmission of a multiwire line may be written as:

$$\begin{aligned} [V] &= c [V]_l + s [\zeta] [I]_l \\ [I] &= c [I]_l + s [\eta] [V]_l \end{aligned} \quad (18)$$

where  $[V]$  and  $[I]$  are the column matrices with entries  $V_1, V_2, \dots, V_n$  and  $I_1, I_2, \dots, I_n$ . They indicate voltages and currents of the wires 1, 2, ..., and n, at the near end. Those at the far end are signified with suffixes  $l$ .  
c and s stand for

$$c = \cosh \gamma l, \quad s = \sinh \gamma l \quad (19)$$

#### IV. Saito section

N. Saito presented a section which would be equivalent to a Brune section plus a line to the left. His section consists of a 2 - wire line, along with a distributed capacitor (an open-circuited coaxial line), as shown in Fig. 3.

Actual calculation yield:

$$\left. \begin{aligned} Z &= \frac{1}{\eta_{11} + \eta_{22} - 2\eta_{12}} \\ C_o &= C_a \\ \Omega_o^2 &= \frac{1}{C_a (\zeta_{22} - \zeta_{12})} \\ \frac{L_1}{M} = n_1 &= \frac{\eta_{11} - \eta_{12}}{\eta_{11} + \eta_{22} - 2\eta_{12}} \end{aligned} \right\} \quad (20)$$

Evidently  $n_1$  must be smaller than 1, from the hyperdominant property of the line.

Eqs. (20) give

$$\left. \begin{aligned} \eta_{12} &= \frac{n_1}{M} - \frac{n_1(1-n_1)}{Z} \\ \eta_{11} &= \frac{n_1}{M} + \frac{n_1^2}{Z} \\ \eta_{22} &= \frac{n_1}{M} + \frac{(1-n_1)^2}{Z} \end{aligned} \right\} \quad (21)$$

$\eta_{12}$  cannot be negative, and therefore it is necessary that

$$Z > (1-n_1)M = M - L_1 \quad (22)$$

Compare this with Eq. (7a). The condition of realizability of Saito's section is just the same as that of Ikeno's. The only advantage of Saito's is that his section can be built with less number of conductors (3 inner and 2 outer) as compared with Ikeno's (4 inner and 4 outer).



## V. Network (I)

The network (I) shown in Fig. 4 has been treated already<sup>4</sup> as an equivalent to a type C section plus a line in the case  $\zeta_{13} > \zeta_{23}$  in a previous report. In the case  $\zeta_{13} < \zeta_{23}$ , on the other hand, the network will go into a Brune section plus a line.

Parameters of the equivalent network are given as:

$$\left. \begin{aligned} \frac{1}{Z} = Y &= \frac{\eta_{11} \eta_{22} - \eta_{12}^2}{\eta_{22}} \\ C_o &= \frac{(\eta_{22} - \eta_{12})^2}{\eta_{22}} \\ M &= \frac{\eta_{22} \eta_{23} (\zeta_{23} - \zeta_{13})}{(\eta_{22} - \eta_{12})^2} > 0 \\ L_2 &= \frac{\eta_{22}^2 (\zeta_{23} - \zeta_{13})^2}{\zeta_{33} (\eta_{22} - \eta_{12})^2} \\ \Omega_o^2 &= \frac{1}{\eta_{23} (\zeta_{23} - \zeta_{13})} \end{aligned} \right\} \quad (23)$$

In this network, the terms ratio

$$\frac{L_2}{M} = n = 1 - \frac{(\eta_{22} - \eta_{12}) \zeta_{13}}{\eta_{23} \zeta_{33}} \quad (24)$$

can only be smaller than unity.

Let the values  $Z$ ,  $C_o$ ,  $\Omega_o$  and  $n$  be given, and entries of  $\eta$  are to be found. Here the problem is, "what conditions are necessary and sufficient on the values  $Z$ ,  $C_o$ ,  $\Omega_o$  and  $n$ , in order that the network (I) would correspond to a hyperdominant  $\eta$ ?"

It is already known that  $n$  must be smaller than unity. Are there any other conditions necessary? To simplify the analysis, first take  $\eta_{12} = 0$ . Then Eq. (23) reduces to

$$\eta_{11} = \frac{1}{Z}, \quad \eta_{22} = C_o$$

$$\Omega_o^2 = \frac{\eta_{11} \eta_{22} \eta_{33} - \eta_{13}^2 \eta_{22} - \eta_{23}^2 \eta_{11}}{\eta_{23} (\eta_{23} \eta_{11} - \eta_{13} \eta_{22})} \quad (25)$$

$$n = 1 - \frac{\eta_{13} \eta_{22}}{\eta_{11} \eta_{23}}$$

Eliminate  $\eta_{11}$  and  $\eta_{22}$  from these equations. Then one obtains

$$\eta_{23} = \frac{(C_o \eta_{33})^{1/2}}{\left(1 + n \Omega_o^2 + \frac{(1-n)^2}{C_o Z}\right)^{1/2}} \quad (26)$$

$$\eta_{13} = \left(\frac{\eta_{33}}{C_o}\right)^{1/2} \frac{1-n}{Z \left(1 + n \Omega_o^2 + \frac{(1-n)^2}{C_o Z}\right)^{1/2}}$$

Hyperdominancy of  $\eta$  requires

$$\eta_{23} \leq \eta_{22},$$

$$\eta_{13} \leq \eta_{11}, \quad (27)$$

$$\eta_{13} + \eta_{23} \leq \eta_{33}$$

Therefore it is necessary that

$$\begin{aligned}\eta_{33} &\leq C_o \left( 1 + n \Omega_o^2 + \frac{(1-n)^2}{C_o Z} \right) \\ \eta_{33} &\leq \frac{C_o \left( 1 + n \Omega_o^2 + \frac{(1-n)^2}{C_o Z} \right)}{(1-n)^2} \\ \eta_{33} &\geq \frac{C_o \left\{ 1 + \frac{1-n}{C_o Z} \right\}^2}{1 + n \Omega_o^2 + \frac{(1-n)^2}{C_o Z}}\end{aligned}\tag{28}$$

The second of these inequalities is naturally satisfied if the first is satisfied.  $\eta$  can be obtained as hyperdominant, if a value of  $\eta_{33}$  can be found that satisfies the inequality.

$$\frac{C_o \left\{ 1 + \frac{1-n}{C_o Z} \right\}^2}{1 + n \Omega_o^2 + \frac{(1-n)^2}{C_o Z}} \leq \eta_{33} \leq C_o \left( 1 + n \Omega_o^2 + \frac{(1-n)^2}{C_o Z} \right)\tag{29}$$

This is always possible if

$$1 + \frac{1-n}{C_o Z} < 1 + n \Omega_o^2 + \frac{(1-n)^2}{C_o Z}\tag{30a}$$

but impossible if

$$1 + \frac{1-n}{C_o Z} > 1 + n \Omega_o^2 + \frac{(1-n)^2}{C_o Z}\tag{30b}$$

The criterion comes down to

$$\begin{array}{ll}\Omega_o^2 > \frac{1-n}{C_o Z} & \text{possible} \\ \Omega_o^2 < \frac{1-n}{C_o Z} & \text{impossible}\end{array}\tag{30c}$$

Substitute  $\Omega_0^2 C_0$  by  $M^{-1}$  and  $nM$  by  $L_2$ , then one will have the same criterion as that in Ikeno's. Network (I) is no better than Ikeno loop, so far as the restrictions are concerned. The advantage of Network (I) may lie in its compactness, with 3 inner conductors and 1 outer conductor, whereas Ikeno loop needs 4 inner and 4 outer.

## VI. Network (II)

Network (II), the second of Fig. 4, has also been shown to be equivalent to a type C section plus a line if  $\eta_{13} < \eta_{2e}$ , as given in a previous report.<sup>4</sup> In case  $\eta_{13} > \eta_{2e}$ , one has transmission zeros on the imaginary axis of  $\lambda$ :

$$\pm \lambda_o = \pm j \Omega_o = \frac{\pm j}{\{(\eta_{13} - \eta_{2e})(\zeta_{22} - \zeta_{23} - \zeta_{12} + \zeta_{13})\}^{1/2}} \quad (31)$$

Other parameters of the equivalent network are given as:

$$\left. \begin{aligned} \frac{1}{Z} &= \eta_{33} - \frac{(\eta_{13} + \eta_{23})^2}{\eta_{11} + \eta_{22} - 2\eta_{12}} \\ C_o &= \frac{(\eta_{11} + \eta_{22} - 2\eta_{12} - \eta_{13} - \eta_{23})^2}{\eta_{11} + \eta_{22} - 2\eta_{12}} \\ \frac{L_2}{M} &= \frac{\eta_{1e} \eta_{3e} + \eta_{13} (\eta_{13} + \eta_{2e} + \eta_{3e}) (\eta_{11} + \eta_{22} - 2\eta_{12})}{(\eta_{13} - \eta_{2e}) \{ \eta_{3e} (\eta_{3e} (\eta_{1e} + \eta_{2e}) + (\eta_{13} + \eta_{23}) (\eta_{1e} + \eta_{2e} + \eta_{3e})) \}} \end{aligned} \right\} \quad (32)$$

Again the problem is to determine  $[\eta]$  for a given set of values of  $Z$ ,  $C_o$ ,  $\Omega_o$  and  $n = L_2/M$ . Let  $\eta_{12} = \eta_{23} = 0$ , then one has

$$\eta_{11} + \eta_{22} = \frac{C_o}{Z} + \eta_{13} + \sqrt{\frac{1}{4} C_o^2 + C_o \eta_{13}} \quad (33)$$

$$\eta_{33} = \frac{1}{Z} + \frac{C_o}{Z} + \eta_{13} - \sqrt{\frac{1}{4} C_o^2 + C_o \eta_{13}}$$

The condition  $\eta_{33} \geq \eta_{13}$  requires

$$\eta_{13} < \frac{1}{Z} + \frac{1}{C_o Z^2} \equiv m \quad (34)$$

For the moment, let aside the equation on  $n$ , and consider the remaining 3 equations on  $\Omega_o$ ,  $Z$  and  $C_o$ . These equations contain  $\eta_{11}$ ,  $\eta_{22}$ ,  $\eta_{33}$  and  $\eta_{13}$ .  $\eta_{22}$  and  $\eta_{33}$  can be expressed in terms of  $\eta_{11}$  and  $\eta_{13}$  by the use of Eq. (33), and upon putting those expressions in Eq. (31), an equation, in  $\eta_{11}$  and  $\eta_{13}$ , will be obtained, from which curves  $\eta_{11}$  versus  $\eta_{13}$  may be plotted. Fig. 5-7 show examples, for  $C_o = \frac{1}{Z}$ ,  $Z = 1$ ,  $C_o = 1$ ,  $Z = 1$ , and  $C_o = 2$ ,  $Z = 1$ . In these figures, all curves  $\eta_{11}$  versus  $\eta_{13}$ , drawn for different values of  $\Omega_o^2$ , pass the 3 points:

- i) the origin (0, 0)
- ii) point P (0,  $C_o$ )
- iii) point S  $\left( 3\sqrt{\frac{C_o}{Z^2}} + 3\sqrt{\frac{C_o^2}{Z}}, C_o + 3\sqrt{\frac{C_o^2}{Z}} \right)$

The curve for  $\Omega_o^2 = 0$  passes Q:

$$(\eta_{13}, \eta_{11})_Q = (m, m) = \left( \frac{1}{Z} + \frac{1}{C_o Z^2}, \frac{1}{Z} + \frac{1}{C_o Z^2} \right) \quad (35)$$

The curves cross over the abscissa at T:

$$(\eta_{13}, \eta_{11})_T = (C_o \Omega_o^2, 0) \quad (36)$$

The curves for  $\Omega_o^2 = \infty$  pass R and U,

$$(\eta_{13}, \eta_{11})_R = (2C_o, 2C_o) \quad (37)$$

$$(\eta_{13}, \eta_{11})_U = \left( \frac{1}{Z} + \frac{1}{C_o Z^2}, C_o + \frac{1}{Z} \right) \quad (38)$$

Points Q, R, S and U will be identical if  $C_o Z = 1$ .

At the neighborhood of the point P,  $\eta_{13}$  and  $\eta_{2e}$  are very small, but  $\eta_{11}$  and  $\eta_{33}$  are equal to  $C_o$  and  $1/Z$  respectively; therefore  $n$  must be very large there.

The shaded areas show the permissible areas of a point  $(\eta_{13}, \eta_{11})$ . The permissible region of a curve  $\eta_{11}$  vs.  $\eta_{13}$  begins at P and ends on the line OQ (as in Fig. 5) or on the line  $\eta_{13} = m$  (as in Fig. 6 and 7). The value of  $n$  changes with  $\eta_{13}$  and must have a certain lower limit because  $\eta_{13}$  has a certain upper limit. TABLE I shows the range of  $n$  thus determined.

TABLE I

Permissible values of  $n$  for Network II,  $\eta_{12} = \eta_{23} = 0$   
( $n = L_2/M$ )

$C_o Z \backslash \Omega_o^2$	0	0.5	1	2	$\infty$	
2	$3 < n$	$4.85 < n$	$7.20 < n$	$12.5 < n$	$\infty$ only	
1	$2 < n$	$3.67 < n$	$5.50 < n$	$9.0 < n$	$\infty$ only	
0.5	$3 < n$	$5.60 < n$	$7.39 < n$	$11.4 < n$	$\infty$ only	

In the above, it was assumed  $\eta_{12} = \eta_{23} = 0$ . Take off this assumption, then one may have a broader range of permissible values of  $n$ .

From the three relations in Eq. (32), one obtains

$$\frac{L_2}{M} = \frac{\eta_{13}(1 + C_o Z) + \eta_{1e} \eta_{3e} Z}{\eta_{13} - \eta_{2e}} \quad (a)$$

The smallest possible value of  $L_2/M$  is

$$n_{\min} = 1 + C_o Z \quad (b)$$

which occurs when  $\eta_{2e} = \eta_{3e} = 0$ . Let us examine if any value of  $\Omega_o$  is permissible or not, under this assumption, that is,  $\eta_{2e} = \eta_{3e} = 0$ ,  $n = n_{\min}$ . Here one has

$$\eta_{1e} = \frac{1}{Z} + C_o, \quad \eta_{13} + \eta_{23} = \frac{1 + C_o Z}{C_o Z^2} \quad (c)$$

$$\eta_{13}^2 \Omega_o^2 = \eta_{13} \eta_{23} + \eta_{12} \left( \frac{1 + C_o Z}{C_o Z^2} \right) \quad (d)$$

The relations (c), along with  $\eta_{2e} = \eta_{3e} = 0$ , satisfy Eq. (32), and the equation (d) is the only condition to be examined.  $\eta_{13}$  and  $\eta_{23}$  are bound by (c),

$$0 \leq \eta_{13} \leq \frac{1 + C_o Z}{C_o Z^2} \quad (e)$$

$$0 \leq \eta_{23} \leq \frac{1 + C_o Z}{C_o Z^2} \quad (f)$$

but  $\eta_{12}$  is arbitrary ( $\eta_{12} \geq 0$ ). Therefore  $\Omega_o$  can be made to take any value from 0 to  $\infty$ .

For example,  $\Omega_o = 0$  when  $\eta_{23} = \eta_{12} = 0$ ;  $\Omega_o = \infty$  when  $\eta_{12} = \infty$  or  $\eta_{13} = 0$ .

Thus it has been shown that  $n = 1 + C_o Z$  is always realizable regardless of the value of  $\Omega_o$ . It is more complicated to show a value of  $n$  greater than  $1 + C_o Z$  is always realizable or not, but one has the affirmative answer, since  $\Omega_o$  can be changed by  $\eta_{12}$ , without affecting other parameters ( $C_o$ ,  $Z$  and  $n$ ). If  $n$  is sufficiently large to satisfy the permissible range given in TABLE I, it is realizable with a line of  $\eta_{12} = \eta_{23} = 0$ .

Of course a line with  $\eta_{\mu v} = 0$  or  $\eta_{\mu e} = 0$  requires an extreme geometrical structure, so that in practice it is desirable to have all positive values for the partial capacitances ( $C_{\mu v}$  and  $C_{\mu e}$ ). This statement applies to all networks described in Chap. V - X.



VII. Network (III)

This network, Fig. 4(III), has a pair of transmission zeros at

$$\pm \lambda_o = \frac{\pm j}{\{(\eta_{33} - \eta_{23})(\zeta_{22} - \zeta_{23} - \zeta_{12} + \zeta_{13})\}^{1/2}} \quad (39)$$

$\lambda_o$  is always imaginary because  $\eta_{33} \geq \eta_{23}$  and  $\zeta_{22} - \zeta_{23} - \zeta_{12} + \zeta_{13} \geq 0$ .

Other network parameters are:

$$Z^{-1} = \eta_{11} - \frac{(\eta_{12} + \eta_{13})^2}{\eta_{22} + \eta_{33} - 2\eta_{23}} \quad (40a)$$

$$C_o = \frac{(\eta_{22} + \eta_{33} - 2\eta_{23} - \eta_{12} - \eta_{13})^2}{\eta_{22} + \eta_{33} - 2\eta_{23}} \quad (40b)$$

$$n = \frac{(\eta_{22} + \eta_{33} - 2\eta_{23}) \eta_{1e} \eta_{3e} + \eta_{13} (\eta_{1e} + \eta_{2e} + \eta_{3e})}{(\eta_{33} - \eta_{23}) \{ \eta_{1e} (\eta_{2e} + \eta_{3e}) + (\eta_{12} + \eta_{13}) (\eta_{1e} + \eta_{2e} + \eta_{3e}) \}} \quad (40c)$$

The expression for  $n$  may be simplified with the use of those for  $Z^{-1}$  and  $C_o$ :

$$n = Z \frac{\eta_{1e} \eta_{3e} + \eta_{13} (\eta_{1e} + \eta_{2e} + \eta_{3e})}{\eta_{3e} + \eta_{13}} \quad (40c')$$

Thus for any values of  $\eta_{1e}$  and  $\eta_{2e} + \eta_{3e}$ ,  $n$  should be within the region

$$\eta_{1e} Z \leq n \leq (\eta_{1e} + \eta_{2e} + \eta_{3e}) Z \quad (41)$$

or

$$0 \leq n \leq 1 + C_o Z \quad (41')$$

On the other hand, one can easily see that  $n$  is greater or smaller than unity according as  $\eta_{13} \eta_{2e}$  is greater or smaller than  $\eta_{12} \eta_3$ .

First the case  $n = n_{\max} = 1 + C_o Z$ ,  $\eta_{3e} = 0$  should be examined, whether it is realizable or not for any value of  $\Omega_o$ . Here one has

$$\begin{aligned} & \eta_{13}^2 (\eta_{1e} + \eta_{2e} + \eta_{3e}) (1 + \Omega_o^2) \\ & - \eta_{13} \{ \eta_{1e} (\eta_{2e} + \eta_{3e}) + (\eta_{12} + \eta_{13}) (\eta_{1e} + \eta_{2e} + \eta_{3e}) \} \\ & - \eta_{23} \eta_{11} (\eta_{22} + \eta_{33} - 2\eta_{23}) = 0 \end{aligned} \quad (42)$$

For a given set of values of  $Z$  and  $C_o$ , one has

$$\eta_{11} = \frac{1}{Z} + (\eta_{12} + \eta_{13}) + \frac{C_o}{Z} - \sqrt{\frac{C_o^2}{4} + (\eta_{12} + \eta_{13}) C_o} \quad (43a)$$

$$\eta_{1e} = \frac{1}{Z} + \frac{C_o}{Z} - \sqrt{\frac{C_o^2}{4} + (\eta_{12} + \eta_{13}) C_o} \quad (43b)$$

$$\eta_{22} + \eta_{33} - 2\eta_{23} = \eta_{12} + \eta_{13} + \frac{C_o}{Z} + \sqrt{\frac{C_o^2}{4} + (\eta_{12} + \eta_{13}) C_o}$$

$$\eta_{2e} + \eta_{3e} = \frac{C_o}{Z} + \sqrt{\frac{C_o^2}{4} + (\eta_{12} + \eta_{13}) C_o} \quad (43d)$$

Therefore the above equation in  $\eta_{13}$  may be considered to be a quadratic one, with  $(\eta_{12} + \eta_{13})$  and  $\eta_{23}$  as parameters.  $\eta_{13}$  has a minimum positive root when  $\eta_{23} = 0$ ,

$$(\eta_{13})_{\min} = \frac{\eta_{1e}(\eta_{2e} + \eta_{3e}) + (\eta_{12} + \eta_{13})(\eta_{1e} + \eta_{2e} + \eta_{3e})}{(\eta_{1e} + \eta_{2e} + \eta_{3e})(1 + \Omega_o^2)} \quad (44)$$

This  $(\eta_{13})_{\min}$  cannot be greater than  $\eta_{12} + \eta_{13}$ ;

$$\eta_{12} + \eta_{13} \geq \frac{\eta_{1e}(\eta_{2e} + \eta_{3e}) + (\eta_{12} + \eta_{13})(\eta_{1e} + \eta_{2e} + \eta_{3e})}{(\eta_{1e} + \eta_{2e} + \eta_{3e})(1 + \Omega_o^2)} \quad (45)$$

which is equivalent to

$$\Omega_o^2 \geq \frac{\eta_{1e}(\eta_{2e} + \eta_{3e})}{(\eta_{12} + \eta_{13})(\eta_{1e} + \eta_{2e} + \eta_{3e})} \quad (45')$$

$\eta_{12} + \eta_{13}$  can be made small or large so far as  $\eta_{1e}$  remains positive, and consequently  $\eta_{1e}$  can be made as small as required. It turns out that the above inequality can hold if one chooses a proper value of  $\eta_{12} + \eta_{13}$ , and consequently some positive values of  $\eta_{23}$  are permissible to fit the assumptions.

Thus one has no restriction on  $\Omega_o$ , so long as the given data are any  $Z$ ,  $C_o$ , and  $n = n_{\max} = 1 + C_o Z$ .

The criterion of realizability for any  $n$  ( $0 < n < n_{\max}$ ) needs more complicated examinations. But  $C_o$ ,  $Z$  and  $n$  specifies  $\eta_{1e}$ ,  $\eta_{2e} + \eta_{3e}$ ,  $\eta_{13}/\eta_{3e}$  in terms of  $\eta_{12} + \eta_{13}$ , whereas  $\Omega_o$  may be changed with the choice of  $\eta_{23}$ . From this fact one can conclude that the only restriction is  $n < n_{\max} = 1 + C_o Z$ .

If one restricts himself to the case  $\eta_{13} = \eta_{23} = 0$ , then he will come to the same restrictions ( $L_1 > L_2$ ,  $Z \geq M - L_2$ ) as in Ikeno loop. Positive values of  $\eta_{13}$  and  $\eta_{23}$  make it possible to take off these restrictions, but still the restriction,  $n \leq 1 + C_o Z$ , remains necessary, to have a hyperdominant  $[\eta]$ .

#### VIII. Network (IV).

The network is shown in Fig. 4 (IV). The input and output currents are made up

of two components respectively:

$$I_{in} = I_1 + I_2 \quad (46)$$

$$I_{out} = I_{1l} + I_{3l}$$

One might better obtain the admittance matrix rather than the cascade matrix:

$$\begin{aligned} [Y] &= \begin{bmatrix} Y_{11} & Y_{12} \\ Y_{12} & Y_{22} \end{bmatrix} \\ Y_{11} &= \frac{1 + \lambda^2 \{ \eta_{22} (\zeta_{11} + \zeta_{22} - 2\zeta_{12}) - 1 \}}{\lambda \zeta_{11} + \lambda^3 \eta_{23}^2 |\zeta|} \\ Y_{22} &= \frac{1 + \lambda^2 \{ \eta_{33} (\zeta_{11} + \zeta_{33} - 2\zeta_{13}) - 1 \}}{\lambda \zeta_{11} + \lambda^3 \eta_{23}^2 |\zeta|} \\ -Y_{12} &= \frac{1 + \lambda^2 \eta_{23} (\zeta_{11} - \zeta_{12} + \zeta_{23} - \zeta_{13})}{c \{ \lambda \zeta_{11} + \lambda^3 \eta_{23}^2 |\zeta| \}} \end{aligned} \quad (47)$$

The transmission zeros of this network are the zeros of  $Y_{12}$ . It has three zeros, one at  $\lambda = 1$ , corresponding to  $c = \infty$ , and the other two at

$$\begin{aligned} \underline{\lambda}_0 &= \frac{\underline{+j}}{\{ \eta_{23} (\zeta_{11} - \zeta_{12} + \zeta_{23} - \zeta_{13}) \}^{\frac{1}{2}}} \\ &= \frac{\underline{+j}}{\left[ \eta_{23} |\zeta| \{ \eta_{2e} \eta_{3e} + \eta_{23} (\eta_{1e} + \eta_{2e} + \eta_{3e}) \} \right]^{\frac{1}{2}}} \end{aligned} \quad (48)$$

$\lambda_0$  is always imaginary. The entries of the cascade matrix of the network are:

$$A = - \frac{Y_{22}}{Y_{12}} = c \frac{1 + \lambda^2 \{ \eta_{33} (\zeta_{11} + \zeta_{33} - 2\zeta_{13}) - 1 \}}{1 + \lambda^2 \eta_{23} (\zeta_{11} - \zeta_{12} + \zeta_{23} - \zeta_{13})} \quad (49a)$$

$$B = - \frac{1}{Y_{12}} = c \frac{\lambda \zeta_{11} + \lambda^3 |\zeta| \eta_{23}^2}{1 + \lambda^2 \eta_{23} (\zeta_{11} - \zeta_{12} + \zeta_{23} - \zeta_{13})} \quad (49b)$$

Since this network has a transmission zero at  $\lambda = 1$ , one can extract a line, from the right-hand side of the network, with the characteristic impedance

$$Z = \frac{1}{[Y_{22}]_{\lambda=1}} = \frac{\eta_{22}}{\eta_{22} \eta_{33} + \eta_{11} \eta_{22} - 2\eta_{13} \eta_{22} - (\eta_{12} + \eta_{13})^2} \quad (50)$$

One can also obtain this value of  $Z$  from  $[\eta]$  and the end connection at the right-hand end of the network:

$$\begin{aligned} \frac{1}{Z} &= \eta_{1e} + \eta_{2e} + \frac{\eta_{2e}(\eta_{12} + \eta_{23})}{\eta_{22}} \\ &= \frac{\eta_{22} \eta_{33} + \eta_{11} \eta_{22} - 2\eta_{13} \eta_{22} - (\eta_{12} + \eta_{23})^2}{\eta_{22}} \end{aligned} \quad (50')$$

After extraction of a line with characteristic impedance  $Z$ , there will remain a network, whose cascade matrix is

$$\begin{bmatrix} A_1 & B_1 \\ C_1 & D_1 \end{bmatrix} :$$

$$A_1 = \frac{1 + \lambda^2 \eta_{23}^2 (\zeta_{11} + \zeta_{33} - 2\zeta_{13}) / \eta_{22}}{1 + \lambda^2 \eta_{23} (\zeta_{11} - \zeta_{12} + \zeta_{23} - \zeta_{13})} \quad (51a)$$

$$B_1 = \frac{\lambda \frac{\zeta_{11}(\zeta_{11} + \zeta_{33} - 2\zeta_{13}) - \eta_{22} |\zeta|}{\zeta_{11} + \zeta_{33} - 2\zeta_{13}}}{1 + \lambda^2 \eta_{23} (\zeta_{11} - \zeta_{12} + \zeta_{23} - \zeta_{13})} \quad (51b)$$

The whole network may be represented as a cascade of  $\pi$ -type Brune section plus a line where

$$L = \zeta_{11} - \frac{\eta_{22} |\zeta|}{\zeta_{11} + \zeta_{33} - 2\zeta_{13}} \quad (52a)$$

$$K = \frac{1}{L} (\zeta_{11} - \zeta_{12} + \zeta_{23} - \zeta_{13}) \eta_{23} \quad (52b)$$

$$\Omega_o^2 = \frac{1}{\eta_{23}(\zeta_{11} - \zeta_{12} + \zeta_{23} - \zeta_{13})} \quad (52c)$$

$$\begin{aligned} \frac{K + K_2}{K} &= \frac{1}{n} = [A_1]_{\lambda = \infty} \\ &= \frac{\eta_{23} (\zeta_{11} + \zeta_{33} - 2\zeta_{13})}{\eta_{22} (\zeta_{11} - \zeta_{12} + \zeta_{23} - \zeta_{13})} \end{aligned} \quad (52d)$$

It can be easily shown that  $n$  is here greater than unity, and therefore  $K_2$  is negative.

Let us see what values of  $L$ ,  $K$ ,  $K$ , and  $K_2$  make it possible to be realized by the network (IV). First put

$$\eta_{12} = \eta_{13} = 0 \quad (53)$$

Then one has also

$$\zeta_{12} = \zeta_{13} = 0 \quad (53')$$

and consequently

$$\zeta_{11} = L + Z = \frac{1}{\eta_{11}} \quad (54a)$$

$$\zeta_{33} = Z + \frac{Z^2}{L} = \frac{\eta_{22}}{\eta_{22}\eta_{33} - \eta_{23}^2} \quad (54b)$$

$$\eta_{22}\eta_{33} = \eta_{23}^2 + \frac{\Omega_o^2 \eta_{23}^2 \eta_{11}}{\eta_{11} - \Omega_o^2 \eta_{23}} \quad (54c)$$

$$\frac{1}{n} = \frac{\eta_{23} (\eta_{22}\eta_{33} - \eta_{23}^2 + \eta_{11}\eta_{22})}{\eta_{22} (\eta_{22}\eta_{33} - \eta_{23}^2 + \eta_{23}\eta_{11})} \quad (54d)$$

Specify  $L$ ,  $Z$  and  $\Omega_o$  and vary  $\eta_{23}$ . Then  $\eta_{22}$  and  $\eta_{33}$  will follow  $\eta_{23}$ . Any positive values of  $\eta_{23}$  are permissible so long as  $\eta_{23} \leq \eta_{22}$  and  $\eta_{23} \leq \eta_{33}$ .

Evidently  $\eta_{23}$  cannot be greater than  $[\Omega_o^2 (L+Z)]^{-1}$  from Eq. (54c). The permissible range of  $\eta_{23}$  corresponds to the permissible range of  $\alpha$ .

Above equations (54a), (54b) and (54c) yield:

$$\eta_{22} \eta_{33} - \eta_{23}^2 = \frac{\Omega_o^2 \eta_{23}^2 \eta_{11}}{\eta_{11} - \Omega_o^2 \eta_{23}} \quad (55a)$$

$$\eta_{22} = \left(Z + \frac{Z^2}{L}\right) \frac{\Omega_o^2 \eta_{23}^2 \eta_{11}}{\eta_{11} - \Omega_o^2 \eta_{23}} \quad (55b)$$

$$\eta_{33} = \frac{L}{Z(L+Z)} \left\{ \frac{1 + \Omega_o^2}{\Omega_o^2} - \frac{\eta_{23}}{\eta_{11}} \right\} \quad (55c)$$

The conditions  $\eta_{22} \geq \eta_{23}$ ,  $\eta_{33} \geq \eta_{23}$  write

$$\eta_{23} \geq \frac{L}{\Omega_o^2 (L+Z)^2} \quad (56a)$$

$$\eta_{23} \leq \frac{1 + \Omega_o^2}{\Omega_o^2} \frac{L}{(L+Z)^2} \quad (56b)$$

One has two cases for the upper limit of  $\eta_{23}$ , according as

$$\frac{1 + \Omega_o^2}{\Omega_o^2} \frac{L}{(L+Z)^2} \leq \frac{1}{\Omega_o^2 (L+Z)} \quad (57)$$

or, that is the same,

$$\frac{\Omega_o^2 L}{Z} < 1 \quad (57')$$

Case 1.

$$\Omega_o^2 L / Z < 1:$$

$$\frac{L}{\Omega_o^2 (L+Z)^2} \leq \eta_{23} \leq \frac{1 + \Omega_o^2}{\Omega_o^2} \frac{L}{(L+Z)^2} \quad (58a)$$

Case 2.

$$\Omega_0^2 L/Z > 1:$$

$$\frac{L}{\Omega_0^2 (L+Z)^2} \leq \eta_{23} \leq \frac{1}{\Omega_0^2 (L+Z)} \quad (58b)$$

In either case, at the minimum permissible value of  $\eta_{23}$ , one has  $\eta_{22} = \eta_{23}$  and  $n=1$ . At the maximum permissible value of  $\eta_{23}$ , one has

$$\text{Case 1:} \quad \eta_{23} = \eta_{33}, \quad n = \frac{1}{1 - \frac{\Omega_0^2 L}{Z}} \quad (59a)$$

$$\text{Case 2:} \quad \eta_{22} = \infty, \quad n = \infty \quad (59b)$$

Thus one will see that any value of  $n$  greater than 1 is realizable in Case 2, but there is an upper limit of  $n$  to be realizable in Case 1.

This network is suitable for the case  $n > 1$ ,  $\Omega_0^2 L/Z > 1$ , because it is then always realizable.

If one replaces the  $\pi$ -type Brune section by a T-type one, the condition  $\Omega_0^2 L/Z \leq 1$  should be replaced by

$$\frac{(n-1)^2}{n} \leq C_0 Z \quad (60)$$

and Eq. (59a) by

$$n_{\max} = \frac{1}{1 - \frac{(n-1)^2}{nC_0 Z}} \quad (61)$$

If  $n_{\max}$  is greater than  $n$ , the value of  $n$  is permissible, but if the contrary, not. Thus only those values of  $n$  that satisfy

$$n > 1 + C_0 Z \quad (62)$$

are permissible.

The above reasoning is based on the assumption  $\eta_{12} = \eta_{13} = 0$ , and consequently the restrictions mentioned may be changed by introducing positive values of  $\eta_{12}$  and  $\eta_{13}$ .

#### IX. Network (V)

This network is shown in Fig. 4 (V). Its equivalent network has parameters of the values:

$$Z = \frac{\eta_{33}}{\eta_{11} \eta_{33} - \eta_{13}^2} \quad (63a)$$

$$C_0 = \frac{\eta_{13}^2}{\eta_{33}} \quad (63b)$$



$$\Omega_o^2 = \frac{1}{\eta_{23} \zeta_{23}} \quad (63c)$$

$$\frac{L_2}{M} = \frac{\eta_{33} (\eta_{23} \eta_{11} + \eta_{12} \eta_{13})}{\eta_{23} (\eta_{11} \eta_{33} - \eta_{13}^2)} \quad (63d)$$

From the above relations one has

$$\left. \begin{aligned} \eta_{11} &= \frac{1+C_o Z}{Z}, \quad \eta_{33} = \frac{\eta_{13}^2}{C_o} \\ \frac{\eta_{12} \eta_{13}}{\eta_{23}} &= \frac{n-1-C_o Z}{Z} \end{aligned} \right\} \quad (64)$$

It is necessary that

$$n \geq 1 + C_o Z \quad (65)$$

in order to give positive values of  $\eta_{12}$ ,  $\eta_{13}$  and  $\eta_{23}$ .

The equations (63a), (63b) and (63d) are satisfied by Eq. (64) and the only equation is Eq. (63c) left for examination. Since

$$\Omega_o^{-2} = \eta_{23} \zeta_{23} = \frac{\eta_{23}^2 \cdot n}{Z |\eta|}, \quad (66)$$

it follows that  $\Omega_o$  may be made arbitrarily small by choosing a small value of  $\eta_{23}$ , or may be made arbitrarily large by choosing a small value of  $|\eta|$ , that is,  $\eta_{1e} \approx \eta_{2e} \approx \eta_{3e} \approx 0$ . Thus the only restriction is the inequality (65). The location of transmission zeros has no concern on the realizability of the network. This network is suitable for comparatively large values of  $n$ .

#### X. Network (VI)

This network has the form Fig. 4 (VI). The values of the parameters of the equivalent network are:

$$Y = \frac{1}{Z} = \eta_{11} - \frac{\eta_{12}^2}{\eta_{22}} \quad (67a)$$

$$C_o = \frac{\eta_{12}^2}{\eta_{22}} \quad (67b)$$

$$\Omega_o^2 = \frac{1}{(\eta_{22} - \eta_{23}) (\zeta_{33} - \zeta_{23})} \quad (67c)$$

$$\frac{L_2}{M} = \frac{\eta_{22} (\zeta_{33} - \zeta_{23})}{\zeta_{33} (\eta_{22} - \eta_{23})} \quad (67d)$$

Put the first and the second of these relations into the last, it may be easily seen that

$$\frac{L_2}{M} = n < 1 \quad (68)$$

For a given value of  $n$ ,  $\Omega_o$  can be made smallest with  $\eta_{1e} = 0$  and  $\eta_{23} = 0$ ,

$$(\Omega_o^2)_{\min} = \frac{1-n}{1+C_o Z} \quad (69)$$

On the other hand,  $\Omega_o^2$  can be made as large as required, regardless of other requirements. Thus

$$\infty > \Omega_o^2 \geq \frac{1-n}{1+C_o Z} \quad (70)$$

or,

$$M-L_2 \leq Z + \frac{1}{C_o} \quad (70')$$

One may choose  $\eta_{1e}$  and  $\eta_{23}$  so small that the inequality (70') is quite near to the equality. Then  $M-L_2$  can be made greater than  $Z$ , but cannot, of course, be made greater than  $Z + \frac{1}{C_o}$ .

Ikeno loop has the restriction  $M-L_2 < Z$  so that this network (VI) has a bit broader range of realizability than Ikeno's.

# XI. Concluding Remarks

## Selection of the networks (I)-(VI)

Chapters V-X makes it possible to adopt one of them, according as  $n = L_2/M$  is greater or smaller than  $1 + C_0 Z$ .

(i)  $n > 1 + C_0 Z$

Here the networks (II), (IV) and (V) may be of use.

(ii)  $n < 1 + C_0 Z$ .

Here network (III) fits the best. If  $n \ll 1$ , networks (I) and (VI) may also be of use; network (VI) has the restriction  $M - L_2 \leq Z + \frac{1}{C_0}$ , network (I) has the restriction  $M - L_2 \leq Z$ ; the latter restriction is the same as those for Ikeno's and Saito's sections

Thus it is always possible to find a distributed equivalent of any Brune section accompanied by any line in cascade. The realized network may be one of the six networks described in chapters V-X. They are made of a three-wire line in a shield, with input and output terminals on opposite ends of the line. This is good for making cascade connections.

The writer is grateful to Prof. D.C. Youla of his suggestion that there may exist distributed sections that may be equivalent to Brune or type C sections, even with same connections.

References

1. N. Ikeno: Fundamental Principles of Distributed Filters, Development Report, Electrical Communication Laboratory, July 1955.
2. N. Saito: Coupled Line Filters, (Thesis), Sept. 1961.
3. A. Matsumoto: Propagation of Waves along Multi-wire Lines, Memorandum 55, PIBMRI 963-61, Oct. 25, 1961.
4. A. Matsumoto: Distributed Equivalents of Darlington Type C Sections, Memorandum 65, PIBMRI-1024-62, 1962

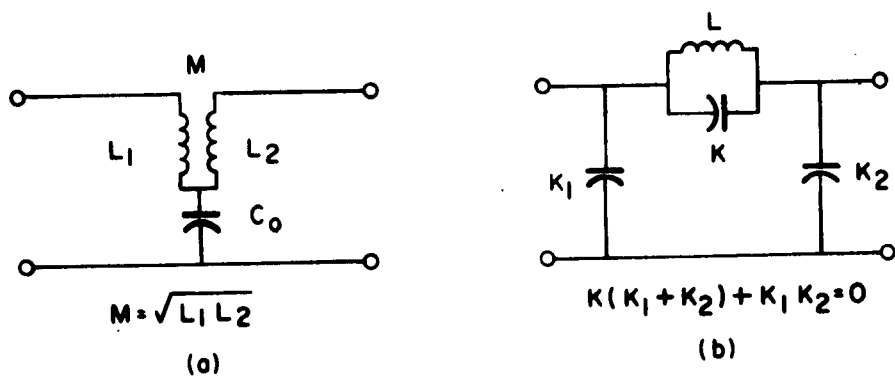


Fig.1. Brune Section in  $T$  or  $\pi$ .




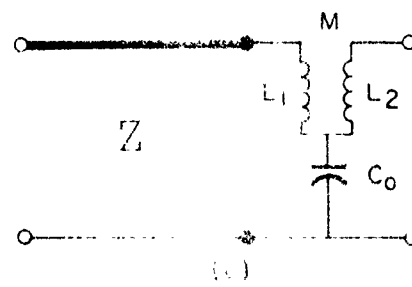


Fig. 2. Ikeno Loop and its Equivalents

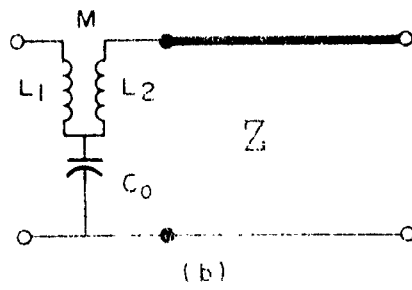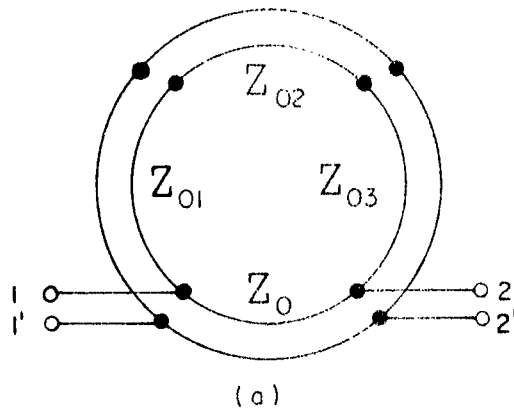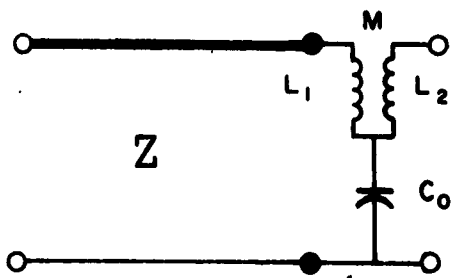

**MRI 18646**

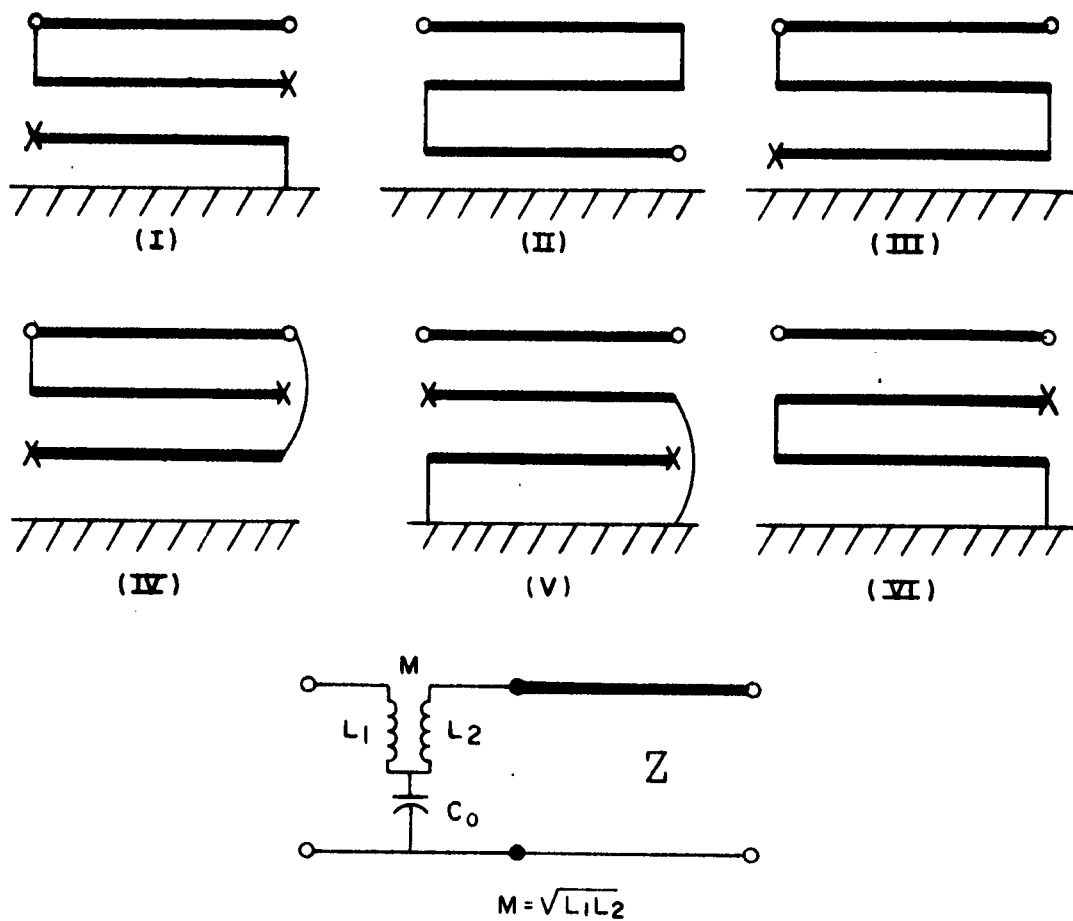


Fig.4. Networks (I)~(VI), Equivalent to Brune Section in Cascade with a Line



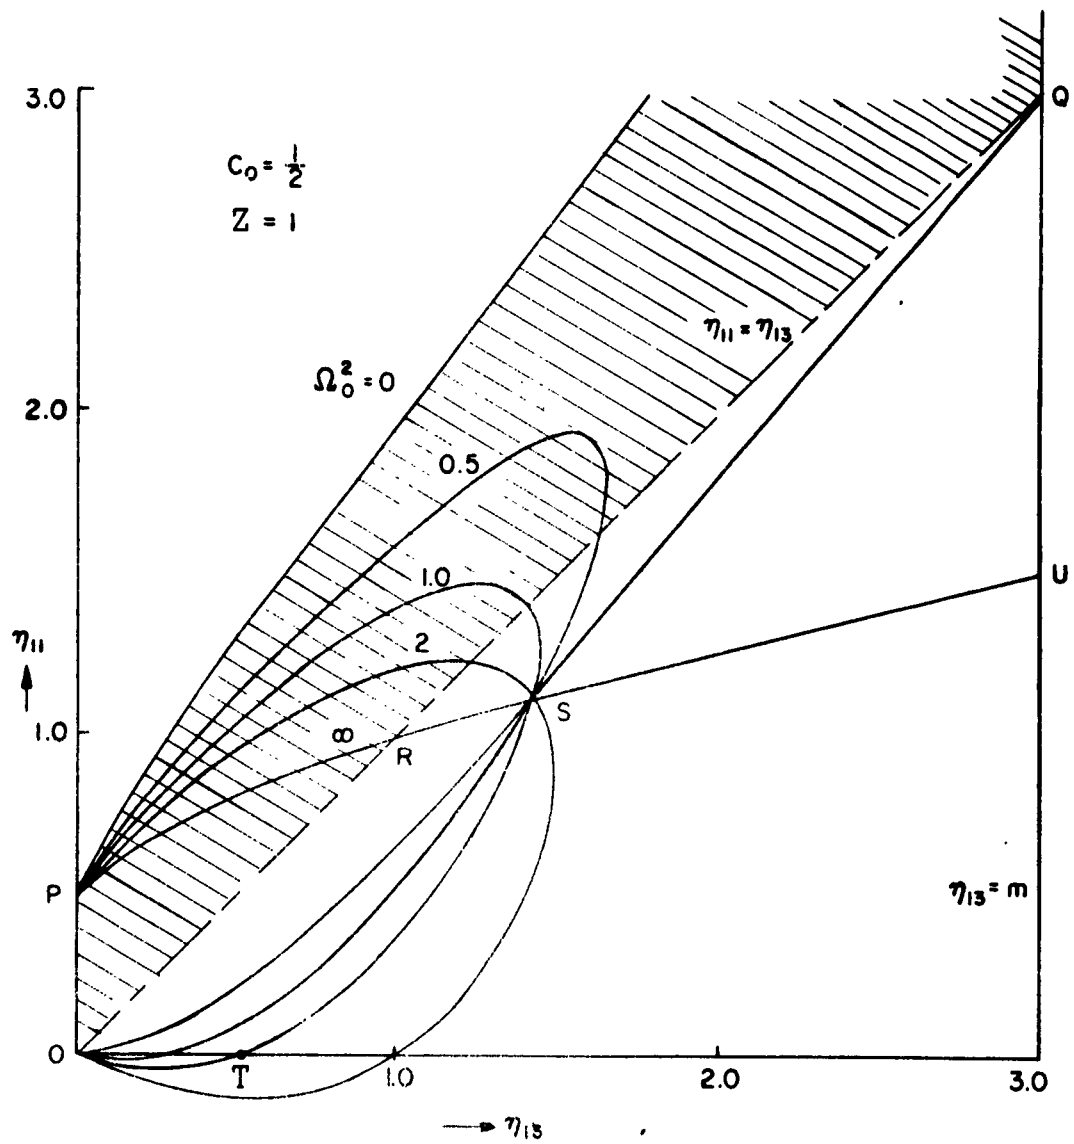


Fig. 5. Curves  $\eta_{11}$  vs.  $\eta_{13}$   
 for  $C_0 = \frac{1}{2}$ ,  $Z = 1$

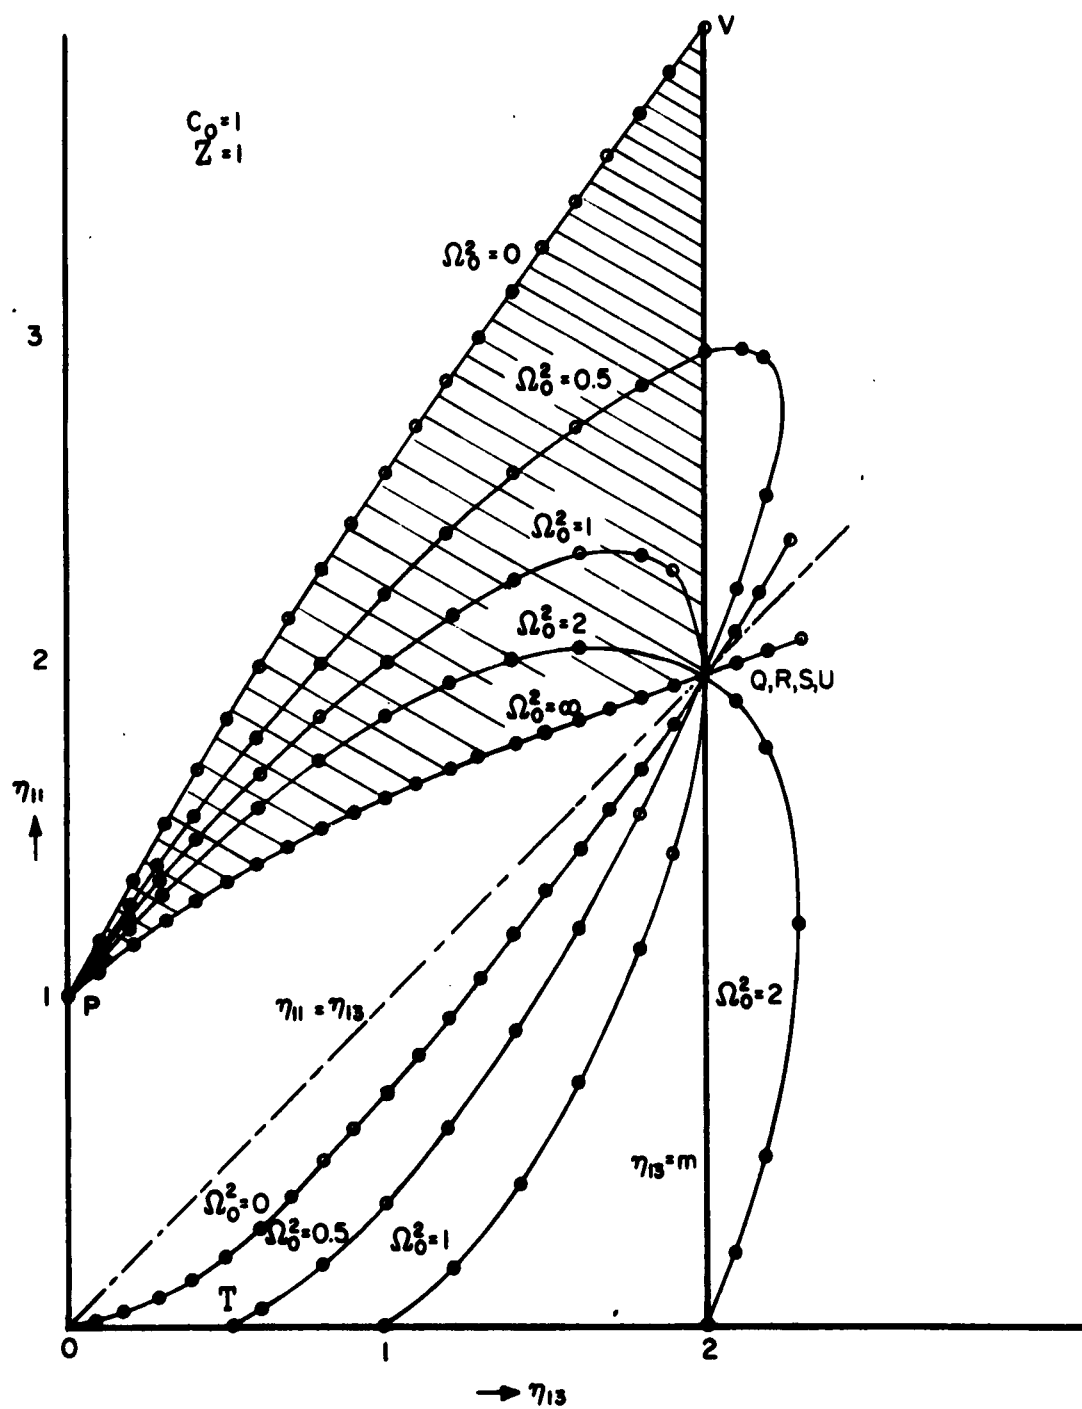


Fig. 6. Curves  $\eta_{11}$  vs  $\eta_{13}$   
for  $C_0=1, Z=1$

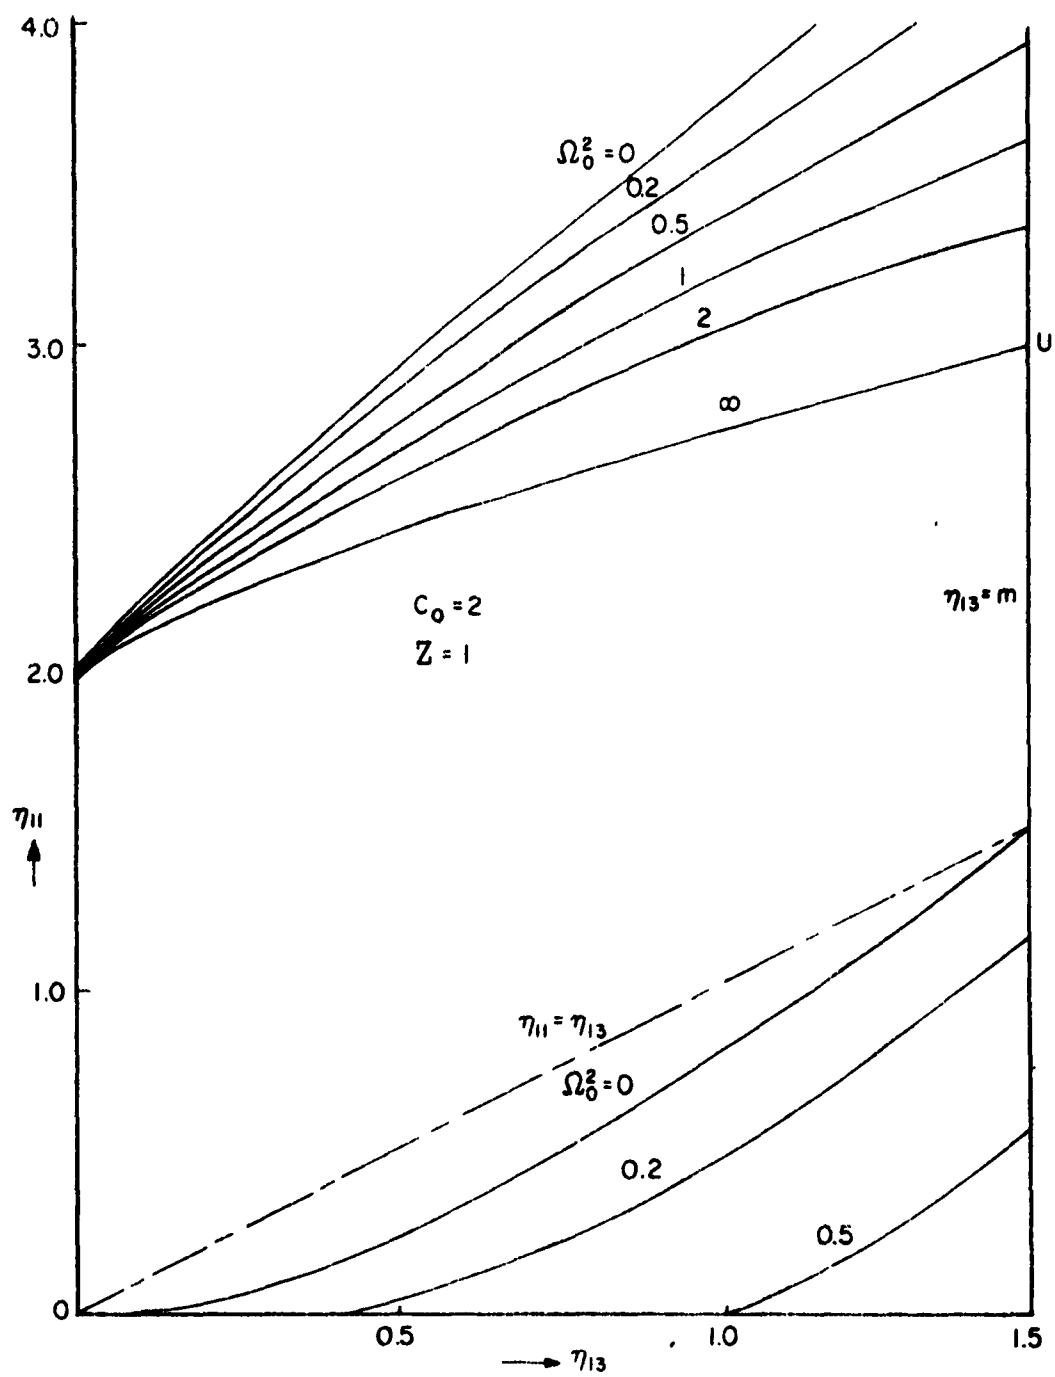


Fig. 7. Curves  $\eta_{11}$  vs.  $\eta_{13}$   
for  $C_0 = 2$ ,  $Z = 1$

UNIVERSITIES:

PIBMR-1038-62

Purdue University  
School of Electrical Engineering  
Lafayette, Indiana

University of Southern California  
Engineering Center  
University Park  
Los Angeles 7, California  
ATTN: Librarian and/or Dr. R. L. Chuan

University of Pennsylvania  
Institute for Cooperative Research  
Room 306 - Logan Hall, 36th and Spruce  
Philadelphia 4, Pennsylvania  
ATTN: A. M. Hadley

Syracuse University  
Electrical Engineering Dept.  
Syracuse 10, New York  
ATTN: Dr. David K. Cheng

Department of Electrical Engineering,  
University of Toronto  
Room 147, Galbraith Building  
University of Toronto  
Toronto 5, Ontario  
ATTN: Professor G. Sinclair

University of Kansas  
Electrical Engineering Department  
University of Kansas  
Lawrence, Kansas  
ATTN: Dr. H. Unz

University of Tennessee  
Ferris Hall  
W. Cumberland Avenue  
Knoxville, Tennessee  
ATTN: J. D. Tillman

Technical Reports Collection  
Gordon McKay Library  
Harvard University  
Div. of Eng'g. and Applied Physics  
Pierce Hall, Oxford St.  
Cambridge 38, Massachusetts  
ATTN: Mrs. Y. Alland

Brown University  
Division of Engineering  
Providence 12, Rhode Island  
ATTN: B. Hazeltine

Massachusetts Institute of Technology  
Research Laboratory of Electronics  
77 Massachusetts Avenue  
Cambridge 39, Massachusetts  
ATTN: Document Room 26-327, John H. Hewitt

Battelle Memorial Institute  
505 King Avenue  
Columbus 1, Ohio  
ATTN: R. T. Compton, Jr.

Cooley Electronics Laboratory  
The University of Michigan  
Room 262, Cooley Building  
Ann Arbor, Michigan

Lowell Technological Institute  
Division of Physics and Engineering  
Science  
Lowell, Massachusetts  
ATTN: Dr. C. R. Mingins, Chairman

Case Institute of Technology  
University Circle  
Cleveland 6, Ohio  
ATTN: Prof. R. E. Collin

Dept. of Electrical Engineering  
Syracuse University  
Syracuse, New York  
ATTN: W. R. La Page

Stanford Research Institute  
Menlo Park, California  
ATTN: External Reports, G-037

Jet Propulsion Laboratory  
California Institute of Technology  
4800 Oak Grove Drive  
Pasadena, California  
ATTN: Mr. Huston Denslow, Library Supervisor

Electrical Engineering Research Laboratory  
The University of Texas  
P. O. Box 7789, University Station  
Austin 12, Texas  
ATTN: John R. Gerhardt

Geophysical Institute of the  
University of Alaska,  
College, Alaska  
ATTN: Library

Physical Science Laboratory  
New Mexico State University  
Box 548  
University Park, New Mexico  
ATTN: Reports Office Librarian

UNIVERSITIES cont'd

Institute of Science and Technology,  
University of Michigan  
P. O. Box 618, Ann Arbor, Michigan  
ATTN: Technical Documents Service

Electronics Research Laboratory  
427 Cory Hall  
University of California  
Berkeley 4, California  
ATTN: Librarian

Ohio State University Research Foundation  
1314 Kennear Road  
Columbus 8, Ohio  
ATTN: Robert A. Foutz

University of Oklahoma  
Norman, Oklahoma  
ATTN: C. D. Farrar

Johns Hopkins University  
W. H. Huggins  
Dept. of Elec. Engrg.  
The Johns Hopkins University  
Baltimore 18, Maryland  
ATTN: W. H. Huggins

New York University  
Department of Electrical Engineering  
181st Street and University Avenue  
Bronx 53, N. Y.  
ATTN: Benjamin Goldin

The Johns Hopkins University  
Carlyle Barton Laboratory  
Charles & 34th Streets  
Baltimore 18, Maryland  
ATTN: Librarian

Illinois Institute of Technology  
3300 S. Federal  
Chicago 16, Illinois  
Dept. of Electrical Engineering  
ATTN: Dr. Lester C. Peach

University of Illinois  
College of Engineering  
ATTN: Dr. P. E. Mayes  
Urbana, Illinois

University of Southern California  
Electrical Engineering Department  
University of Southern California  
Los Angeles 7, California  
ATTN: Dr. R. M. Gagliardi

University of Wisconsin  
Dept. of Electrical Engineering  
Engineering Building  
Madison 6, Wisconsin  
ATTN: Dr. E. H. Scheibe

Space Sciences Laboratory  
University of California  
Berkeley 4, California  
ATTN: S. Silver

University of Hawaii  
Electrical Engineering Department  
University of Hawaii  
Honolulu 14, Hawaii  
ATTN: Dr. Paul C. Yuen

University of Illinois Library  
Documents Division  
Urbana, Illinois

Cornell University  
Phillips Hall  
Ithaca, New York  
ATTN: G. C. Dalman, Prof.

The University of Texas  
Dept. of Physics  
The University of Texas  
Austin 12, Texas  
ATTN: Professor Claude W. Horton

Professor Vitold Belevitch  
Director,  
Comite d'Etude et d'Exploitation  
des Calculateurs Electroniques  
67 Rue De La Croix de Fer  
Brussels, Belgium

Dr. Yosiro Oono  
Faculty of Engineering  
Kyushu University  
Hukuoka, Japan

Dr. B.B.H. Tellegen  
Scientific Advisor  
Philips Research Laboratory  
Eindhoven, Netherlands

Professor Hiroshi Ozaki  
Faculty of Engineering  
Osaka University  
Higashinoda,  
Osaka, Japan

UNIVERSITIES Cont'd

W. Olja Saraga  
Section Leader  
Research Laboratory Siemens Edison Swan, Ltd.  
Grooves Place  
Blackheate  
London S.E. 3, England

Professor T. Pajlasek  
Dept of Electrical Engineering  
McGill University  
Montreal, P.Q.  
Canada

Polytechnic Institute of Brooklyn      80 copies  
55 Johnson Street  
Brooklyn, N.Y.  
ATTN: Dr. H. Carlin

Stanford University  
Department of Electrical Engineering  
Stanford, California

Electronics Research Laboratory  
Stanford University  
Stanford, California  
ATTN: Prof. Buss

Carnegie Institute of Technology  
Dept. of Electrical Engineering  
Pittsburgh, Pennsylvania  
ATTN: Dr. Williams

## INDUSTRIAL LABORATORIES

Boulder Laboratories  
National Bureau of Standards  
Boulder, Colorado  
ATTN: Library

Airborne Instruments Laboratory, Inc  
Walt Whitman Road  
Melville, Long Island, New York  
ATTN: Library

The Mitre Corporation  
Bedford, Massachusetts  
ATTN: Library

Lincoln Laboratory, M I T  
P O Box 73  
Lexington 73, Mass  
ATTN: Library A-082

IBM Research Library  
Thomas J Watson Research Center  
P O Box 218  
Yorktown Heights, New York  
ATTN: Reports Section

The Boeing Company  
Aero-Space Division  
P O Box 3707  
Seattle 24, Washington  
ATTN: R R Barber, Library Unit Chief

Micro State Electronics Corporation  
152 Floral Avenue  
Murray Hill, New Jersey  
ATTN: Dr Samuel Weisbaum

Space Technology Labs, Inc  
STL Technical Library  
Space Technology Labs, Inc  
One Space Park  
Redondo Beach, Calif  
ATTN: Acquisitions

RCA Laboratories  
David Sarnoff Research Center  
Princeton, N J  
ATTN: Fern Cloak, Librarian

Hughes Aircraft Company  
Florence and Teale Streets  
Culver City, California  
ATTN: Dr W H Kummer

Sylvania Electronic Systems--West  
Electronic Defense Labs  
P O Box 205  
Mt View, Calif  
ATTN: Document Center

Pickard & Burns, Inc  
103 Fourth Ave  
Waltham 54, Massachusetts

A S Thomas, Incorporated  
355 Providence Highway  
Westwood, Mass  
ATTN: A S Thomas

International Microwave Corporation  
105 River Road  
COS COB, Conn

TRG, Incorporated  
2 Aerial Way  
Syosset, N Y  
ATTN: Library

The Rand Corporation  
1700 Main Street  
Santa Monica, California  
ATTN: Director, USAF Project RAND  
via: AF Liaison Office

Lockheed Missiles & Space Company  
Technical Information Center (50-14)  
3251 Hanover Street  
Palo Alto, California  
ATTN: Dr W A Kozumplik, Manager

Chu Associates  
Whitcomb Avenue  
P O Box 387  
Littleton, Massachusetts  
ATTN: Ivan M Faigen, General Manager

Mathematical Reviews  
190 Hope Street  
Providence 6, R. I.

National Research Council  
Radio and Electrical Eng Div  
Ottawa, Ontario, Canada  
ATTN: Dr G A Miller, Head Microwave  
Section

Texas Instruments Incorporated  
Apparatus Division  
6000 Lemmon Ave, Dallas 9, Texas

U S Air Force

Ballistic Research Laboratories  
Aberdeen Proving Ground  
Maryland  
ATTN: Dr Keats Pullen

Aeronautical Systems Division  
ATTN: ASRNEA-2 (Mr G R Branner)  
Wright-Patterson AFB, Ohio

Air Force Academy  
Attn: Library  
Colorado Springs, Colo.

ASD (ASNRD, Mr A D Clark)  
Directorate of System Eng  
Dyna Soar Engineering Off  
Wright-Patterson AFB, Ohio

AFCL AFRD (CRREL)  
L G Hanscom Fld, Mass

ESD (ESRDW)  
ATTN: Capt John J Hobson  
L G Hanscom Fld, Mass

RADC (RAT)  
ATTN: Dr John S Burgess  
Griffiss AFB, N Y

AF Missile Dev Cen (MDGRT)  
ATTN: Technical Library  
Holloman AFB, New Mexico

AFOSR (SRV, Technical L)  
14th St and Constitution Ave  
Wash D C

AFCL AFRD (CRRL)  
ATTN: Contract Files  
L G Hanscom Fld, Mass

AFSC (SCSE)  
Andrews AFB  
Wash 25 D C

APGC (PGAPI)  
Eglin AFB Fla

AFSWC (SWOI)  
Kirtland AFB New Mex

AFMTC (Tech Library MU-135)  
(MTBAT)  
Patrick AFB Fla

RADC (RAAPT)  
Griffiss AFB N Y

RADC (RAALD)  
Griffiss AFB N Y

GEEIA (ROZMCAT)  
Griffiss AFB N Y

RADC (RAIS, ATTN: Mr Malloy)  
Griffiss AFB N Y

Signal Corps Liaison Officer  
RADC (RAOL, ATTN: Maj Norton)  
Griffiss AFB N Y

AUL (RT)  
Maxwell AFB Ala

ASD (ASAPRD)  
Wright-Patterson AFB Ohio

U S Strike Command  
ATTN: STRJ5-OR  
Mac Dill AFB Fla

AFSC (SCFRE)  
Andrews AFB  
Wash 25 D C

Hq USAF (AFCOA)  
Wash 25 D C

AFOSR (SRAS/Dr G R Eber)  
Holloman AFB New Mex

Commandant  
Armed Forces Staff College (Library)  
Norfolk 11 Va

ADC (ADOAC-DL)  
Eng AFB Colo

AFMTC (FTOOT)  
Edwards AFB Calif

ESD (ESRL)  
L G Hanscom Fld  
Bedford Mass

ESD (ESAT)  
L G Hanscom Fld  
Bedford Mass



U S Air Force

AFLC (MCGSAD)  
WPAFB Ohio

ADC (ADMLP-D)  
Ent AFB Colo

CONAC (OCC-O)  
Robins AFB Ga

ADC (ADMME-DC)  
Eng AFB Colo

Institute of Technology Library  
MCLI-LIB, Bldg 125, Area F  
Wright-Patterson AFB Ohio

USAFSS (ECD)  
San Antonio Tex

ASD (ASROO)  
(ASNE)  
Wright-Patterson AFB Ohio

Hq TAC (DORQ-S)  
(DOC-C)  
(OA)  
Langley AFB Va

Hq USAF (AFRDC)  
(AFRDR-NU)  
(AFOAC)  
(AFRDP-S)  
(AFRCE-EA)  
(AFOAC-A)  
(AFCOA)  
(AFOMO-X-L)  
(AFOOP-SV-E)

Wash 25 DC

OIC, FTD Library  
Bldg 828 Area "A"  
Wright-Patterson AFB Ohio

AFSC STLO  
111 E 16th St  
New York 3 NY

AFSC STLO  
6331 Hollywood Blvd  
Los Angeles 28 Calif

AFMDC (MDO)  
Holloman AFB New Mex

AFFTC (FTGD)  
Edwards AFB Calif

ASTIA (TISIA-2) 10 cys  
Arlington Hall  
Arlington 12, Va.

Rome Air Development Center 5 cys  
Griffiss AFB, NY  
ATTN: (H. Webb, RAWB)

AUL (ST)  
Maxwell AFB, Alabama

National Aeronautics and Space Admin.  
Langley Research Center  
Langley Station  
Hampton, Virginia  
Attn: Librarian

RTD (RTGS)  
Tolling AFB  
Washington 25, DC

Hq OAR 2 cys  
Tempo D. Bldg  
4th St. & Independence Ave, S.W.  
Washington 25, D.C.  
ATTN: Maj. Ernest Davis